



TELESCOPIC HANDLER

Model: **MIH 9.40**

Technical Specifications



ENGINE

Brand & Model	PERKINS 904J-E36TA @ Commonrail	PERKINS 904J-E36TA @ Commonrail
Emission	Stage 5	Stage 5
No. Of Cylinders	4	4
Displacement	3621 ccm	3621 ccm
Power Rating	75 hp / 55,4kW @2300rpm	100 hp / 74,4kW @2300rpm
Torque Rating	424Nm@1200rpm	430Nm@1500rpm
Aspiration	Commonrail with direct injection @ Turbocharged aftercooler	Commonrail with direct injection @ Turbo charged aftercooler
Cooling	Water cooled	Water cooled

PERFORMANCE

Model Family	9 M
Max. Lifting Capacity	4000 kg
Max. Lifting Capacity at Full Height	3500 kg
Capacity at Max. Forward Reach	1400 kg
Max. Lifting Height	8.80 m
Max. Forward Reach	5.00 m
Max. Towable Trailer Weight (kg) (With/Without Brake)**	3000-14000 kg

TRANSMISSION

Type Of Transmission	Hydrostatic transmission with variable piston pump @ 2-speed
Gearbox Speed (Fwd/Rvs)	2 / 2
Max. Travelling Speed	35 km/h (75 kW) / 30 km/h (55 kW)
Steering Modes	2 WS, 4WS, 4WS-Crab

AXLES, BRAKE SYSTEM and TYRES

Axles	LSD type rigid front axle & swinging type rear axle
Brake System	Front / Rear multi-disc type oil bath & with inching
Parking Emergency Brake	Negative parking brake (SAHR)
Tires	405/70-24

HYDRAULIC SYSTEM

Hydraulic Pump	Load sensing type variable piston pump
Main Control Valve	Electro-hydraulic control
Max. Flow	100 l/min
System Pressure	240 bar
Joystick Control	7 in 1 @ FNR & Gear up-down shift

NOISE

Noise at Driving Position LpA*	80 db(A)
Noise to Environment LwA*	102 db(A)


FLUID CAPACITIES

Fuel Tank	120 l
Hydraulic Tank	110 l
Standart Machine Operating Weight	8.900 kg

CYCLE TIMES

Lifting	11.00 s
Lowering	7.60 s
Extension	10.70 s
Retraction	7.50 s
Crowd	3.50 s
Dump	3.50 s

Load Chart (On Tires)

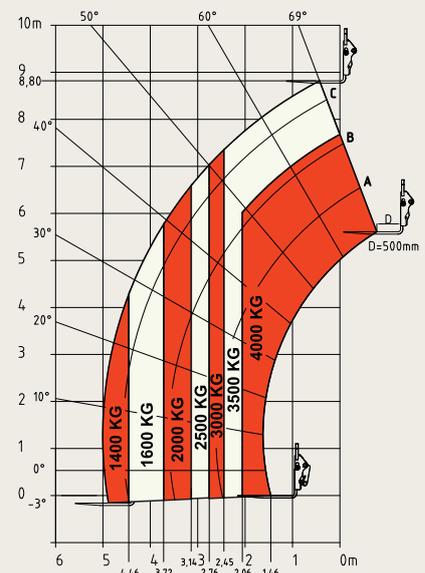

MST

TELEHANDLER




MIH 9.40



Single Extendable Boom

DIMENSIONS

A-Wheelbase	3000 mm
B-Overall Length To Front Face of Tyres	4735 mm
C-Overall Length To Carriage	5672 mm
D-Ground Clearance	400 mm
E-Inside Tyre Width	1930 mm
F-Overall Width	2345 mm
G-Overall Cab Width	971 mm
H-Overall Height	2450 mm
I-Tow Bar	80 mm
J- Turning Radius (Engine Hood)	1450 mm
K- Turning Radius (Over Tyres)	4100 mm
Standard Forks ***	120 x 50 x 1200 mm

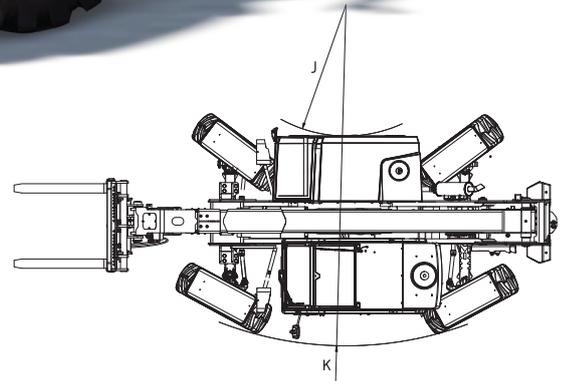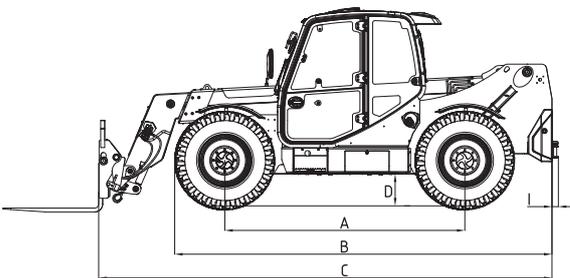

The information, visual, model and equipments features indicated in this document can be offered as standard or optional depending on the country and region. MST, reserves all the rights to make changes without notice for the information, values and designs contained this document.

MST CONSTRUCTION EQUIPMENT YATIRIM A.Ş.

4. Organize Sanayi Bölgesi 83426 Cad. No:1
Başpınar / Gaziantep / TÜRKİYE
Phone: +90 342 211 59 00 444 2 767
Fax: +90 342 357 00 32 export@mst-tr.com



f mstismakinalari @ mstismakinalari in MST İş Makinaları

X mstmakina YouTube MST İş Makinaları

www.mst-tr.com

www.asko.com.tr